



ATLANTEX
Manufacturing Corp.

High Temperature Textiles

Sleeving / Rope / Tape / Gasket / Wire

Protects Cables, Hoses and Wires from High Heat, Flame and Abrasion

▶ Home

▶ About Us

▶ Contact Us

PRODUCTS

Firesleeves

Braided Sleeving

Rope Products

Tape Products

Abrasion Sleeves

Spiral Guard Wrap

Gasket & Wire Products

Blankets

▶ Capabilities

▶ Sign-Up for Updates



Interested in becoming
a distributor?
[click here](#)

Spiral Guard Wrap


The use of Atlantex Spiral Guard Wrap is an economical and convenient method of protecting and extending the life of hydraulic and pneumatic hoses, cables, wires and rope from premature wear.

Manufactured from extruded high density polyethylene, Spiral Guard Wrap will withstand the extremes of climate and operating conditions. The HDPE extrusion process provides a product with round edges which make for easy installation, while protecting against abrasion, cuts, crushing, UV and various hazards which can destroy expensive hose and cable assemblies. Larger sizes are used for both protection and bundling of multiple hose applications.

- Spiral Guard Wrap : Sizes ranging from 3/8" to 5-1/2"
- Standard Colors: UV resistant black and yellow
- Resistant to: Acids, oils and solvents
- Material: High Density Polyethylene (HDPE)
- Temp Range: -60°F thru 200°F
- Qualities: Flexible and recyclable



Spec#	Size	Spiral ID	Hose O.D. Range	Wall Thickness	Ft/Carton
SGW06	-6	3/8"	1/4" to 1/2"	0.05"	100
SGW08	-8	1/2"	1/2" to 11/16"	0.05"	100
SGW12	-12	3/4"	11/16" to 7/8"	0.08"	100
SGW16	-16	1"	7/8" to 1-1/8"	0.09"	100
SGW20	-20	1-1/4"	1-3/8" to 1-3/8"	0.10"	100
SGW24	-24	1-1/2"	1-3/8" to 1-5/8"	0.11"	100
SGW32	-32	2"	1-5/8" to 2-3/16"	0.13"	100
SGW40	-40	2-1/2"	2-3/16" to 2-5/8"	0.15"	100
SGW48	-48	3"	2-5/8" to 3-1/4"	0.17"	75
SGW56	-56	3-1/2"	3-1/4" to 3-5/8"	0.19"	50
SGW64	-64	4"	3-5/8" to 4-1/2"	0.22"	50
SGW80	-80	5"	4-1/2" to 5-1/8"	0.23"	40
SGW88	-88	5-1/2"	5-1/8" to 5-7/8"	0.25"	30

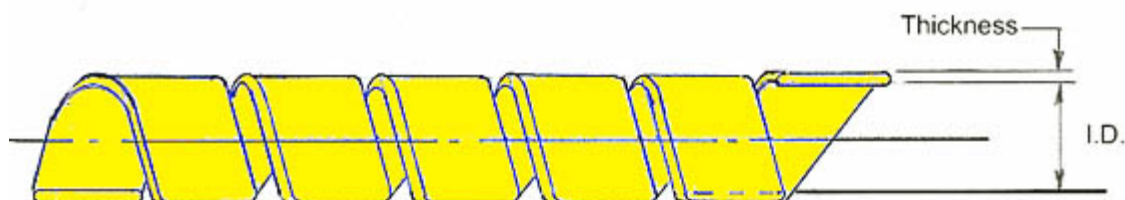

[Request a Quote](#)

©2010 Atlantex Manufacturing Corp. Phone: (610) 518-6601 Fax: (610) 518-6602

Google Translate
Select Language

 [Gadgets](#) powered by Google