


HYDRAULIC MAINTENANCE & SAFETY

Tips to prevent downtime and save you money.

Safe
Hydraulics

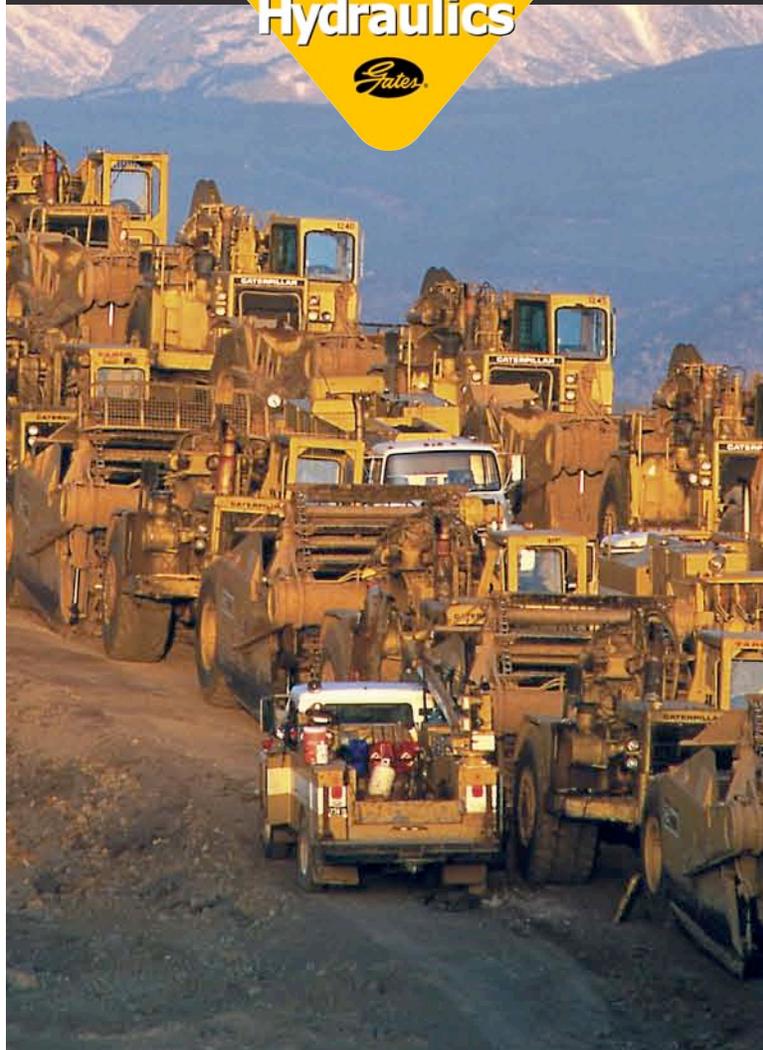

Presented by Gates Corporation



TABLE OF CONTENTS



WHY PREVENTIVE MAINTENANCE?	1
CHOOSING THE RIGHT COMPONENTS	2
AGENCY SPECIFICATIONS	6
COUPLING IDENTIFICATION	8
HOSE ROUTING	13
HOSE CLEANLINESS	16
ASSEMBLY INSTALLATION	17
PERIODIC INSPECTIONS	21
HOSE TROUBLESHOOTING	22
SAFE HYDRAULICS	25

WHY PREVENTIVE MAINTENANCE?

Hydraulic preventive maintenance and safety is important for anyone who operates hydraulically powered equipment. Improperly maintained assemblies can cause premature hose failure and blowouts, resulting in equipment downtime, possible equipment damage, personal injury and even death.

At Gates, we believe following proper preventive maintenance procedures is time well spent. Shown below are some of the numerous benefits provided by preventive maintenance.

Let's take a look at some preventive maintenance and safety procedures. They'll put you on the right track to safe and long-lasting hydraulic assemblies.



BENEFITS

- Reduce downtime
- Improve production
- Increase efficiency of maintenance personnel
- Enhance control of spare parts inventory
- Decrease safety hazards and accidents
- Extend equipment service life
- Reduce capital outlays for new equipment

CHOOSING THE RIGHT COMPONENTS

Don't Mix 'N' Match



Safe, long-lasting hydraulic assemblies begin by choosing the right components. The “right” components are couplings, hoses, crimping equipment and accessories that are all designed to work together. Most manufacturers offer safe, high-quality components. But mixing and matching couplings from one manufacturer with hoses from another manufacturer can lead to premature or catastrophic assembly failure.



That's because hoses, couplings, assembly equipment and crimping tolerances vary from one manufacturer to another, and they're not interchangeable. When components from different manufacturers are mixed together, coupling retention can be adversely affected. Mixing components can not only cause unnecessary downtime, it can result in personal injury as well. In addition, the thread or flange ends of couplings must be properly matched to their mating components to create leak-proof connections.

SAE J517 – “SAE J517 hose from one manufacturer is usually not compatible with SAE J516 fittings supplied by another manufacturer.”

Gates offers a complete line of hoses, couplings, crimpers and related equipment, all designed to work together as a system. Gates components meet stringent test requirements and are engineered to provide the highest quality, longest lasting, safest assemblies available. Your Gates distributor is specially trained to make sure you get the hose assemblies that best meet your needs.

The Critical Design Factor

Hydraulic system performance is determined by the weakest component, which is often the hose/coupling interface. Controlling how the coupling is connected to the hose and their interaction is critical to designing effective, reliable and safe hydraulic hose assemblies.

Choosing the Right Hose


Choosing the right hose is the first step to long and safe assembly service life. But before we look into how to select the proper hose for the job, let's first take a look at the benefits of using rubber hose in fluid power applications. Unlike rigid tubing, rubber hose offers several advantages:

- **Less susceptible to vibration and movement**
- **Requires no brazing or specialized bending**
- **Easier to obtain in the aftermarket**
- **Faster to route around obstacles**
- **Absorbs sound and impulses**
- **Dampens pressure surges**

Given its superior availability and routing advantages, rubber hose is preferred over metal tubing by most maintenance personnel. In fact, it's not uncommon for maintenance technicians to replace metal tubing with a hose assembly.

Hose Construction

Hydraulic hoses have three parts: the cover, tube and reinforcement. The cover protects the tube and reinforcing material from environmental conditions like adverse weather, ozone, abrasion, heat, chemicals, etc. Choose a hose with a cover that can meet the demands of your system, especially in abrasive situations or if the hose will be exposed to chemicals or extreme temperatures.

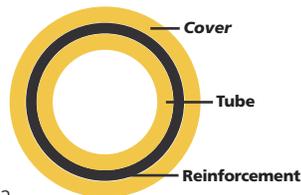

The tube is the part of the hose that comes in contact with the hydraulic fluid. Reinforcement allows the hose to withstand internal pressures, or in the case of suction/vacuum hose, external pressures. Hoses generally have braided, spiraled or helical reinforcement. The type of reinforcement depends on the intended use of the hose. The three basic types of reinforcement are:

Braided reinforcement can be wire or textile and can have single or multiple layers.

Spiraled reinforcement on hydraulic hose is typically wire or textile and has four or six layers (plies). Spiral-reinforced hose can typically handle more severe applications with longer impulse service life.

Helical coil reinforcement keeps the hose from collapsing during suction (vacuum) and tight bending.

When choosing a hose, it's crucial that the cover, tube and reinforcement are all compatible with the type of fluid conveyed in the system. This is an important point to remember, because many hoses are not compatible with all of the hydraulic fluids on the market today, including petroleum-based, phosphate esters, water-based and diester fluids.


Other variables, such as elevated temperatures, fluid contamination and fluid concentration, will also affect compatibility. When in doubt, consult the hose manufacturer.

The "STAMPED" Method

Studies by fluid power manufacturers indicate that the three most common causes of hydraulic hose failure are abuse, misapplication and improper plumbing. Equipment operators and technicians can reduce, if not eliminate, premature hydraulic hose failure by giving maximum consideration to hose assembly selection and installation.

Yet, with all of the different types of hoses on the market, choosing the right one can be difficult.

Gates suggests using the "STAMPED" method to ensure you get the right hose assembly for the job. "STAMPED" stands for Size, Temperature, Application, Material to be conveyed, Pressure, Ends or couplings, and Delivery. Here's how it works:

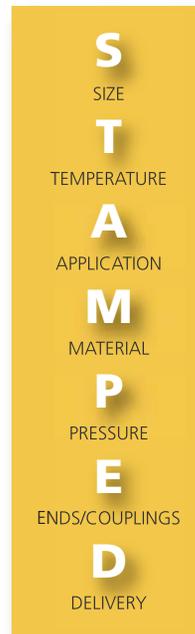

Size – Choose a hose with an inside diameter that is adequate to minimize pressure loss and to avoid hose damage caused by the heat generated by excessive fluid turbulence.

Temperature – The hose must be able to withstand the system's minimum and maximum fluid and ambient temperatures.

Application – Determine where or how the hose will be used. You'll need to know the equipment type, working and impulse pressures, fluid to be used, bend radius, static conductivity, etc.

Material to be conveyed – The hose, including the hose tube and cover, along with the couplings and O-rings, must be compatible with the type of fluid being conveyed.

Pressure – Know the system pressure, including pressure spikes. The hose's published working pressure must be equal to, or greater than, the normal system pressure and any pressure surges it will encounter.

Ends or Couplings – Identify the type of threads the system uses and select couplings that are compatible with those thread types.

Delivery – How many hose assemblies do you need and when do you need them? Your local Gates distributor will work with you to make sure you get the assemblies you need just in time.

Hose Size (Dash Numbers)

Dash Size	Hose I.D. (inches)			
	All except C5 Series, C14 and AC134a		C5 Series, C14 and AC134a	
	Inches	Millimeters	Inches	Millimeters
-2	1/8	3.2	—	—
-3	3/16	4.8	—	—
-4	1/4	6.4	3/16	4.8
-5	5/16	7.9	1/4	6.4
-6	3/8	9.5	5/16	7.9
-8	1/2	12.7	13/32	10.3
-10	5/8	15.9	1/2	12.7
-12	3/4	19.0	5/8	15.9
-14	7/8	22.2	—	—
-16	1	25.4	7/8	22.2
-20	1 1/4	31.8	1 1/8	28.6
-24	1 1/2	38.1	1 3/8	34.9
-32	2	50.8	1 13/16	46.0
-36	2 1/4	57.6	—	—
-40	2 1/2	63.5	2 3/8	60.3
-48	3	76.2	—	—
-56	3 1/2	88.9	—	—
-64	4	101.6	—	—
-72	4 1/2	115.2	—	—

AGENCY SPECIFICATIONS

Industry Agencies

ABS – American Bureau of Shipping

AS – Australia Standard

DIN – Deutsch Industry Norm, German

DNV – Det Norske Veritas for North Sea Floating Vessels

EN – European Norm/Standard

GL – Germanischer Lloyds

IJS – Industrial Jack Specifications

RCCC – Regular Common Carrier Conference for Fleet Truck and Bus

SAE – Society of Automotive Engineers

Hose Type	ABS	AS	DIN	DNV	EN	GL	IJS
EFG6K,G6K	X	X	20023 4SH/4SP	X	EN 856 4SH/4SP		
EFG5K,G5K	X	X	20023 4SH/4SP	X	EN 856 4SH/4SP		
EFG4K,G4K	X	X	20023 4SP		EN 856 4SP		
EFG3K,G3K	X		20023 4SP		EN 856 4SP		
C12M	X	X	20023 4SP	X	EN 856 4SP		
C12	X		20023 4SP		EN 856 4SP		
M5K		X					X
M4K+	X	X					X
M4KH	X						X
G2XH							
G2AT-HMP							
M2T®	X	X		X			
CM2T					EN 853 2CS		
G2		X	20022 2SN	X	EN 853 2SN		X
G2H		X		X	EN 853 2SN		
J2AT							X
M3K	X	X		X	EN 857		X
M3K -12, -16	X	X		X	EN 857		X
G1		X	20022 1SN	X	EN 853 1SN		X
G1H				X	EN 853 1SN		
MegaTech™							
TR500							
NABT							
C5C							
C5E							
C5D							
C5M		X					
G3H					EN 854 R3		
GTH					EN 854 R6		
GMV		X@	X				
LOL							
Thermoplastic							
GT8, GT8NC							
GT7, GT7NC**							
C14							
Refrigerant							
PolarSeal®							
AC134a							
Power Steering							
PS188							

* Except 1/4"

** GT7NC meets ANSI A92.2 for vehicle mounted aerial devices (-3 to -8)

Government Agencies
DOT/FMVSS – U.S. Department of
 Transportation/Federal Motor Vehicle
 Safety Standard

MSHA – U.S. Mine Safety and Health
 Administration
USCG – U.S. Coast Guard

RCCC	SAE	DOT/FMVSS	MSHA	USCG	
				Fuel Oil	Power
	100R15		X		X
	100R13		X		X
	100R12		X		X
	100R12		X		X
	100R12		X		X
	100R12		X		X
	100R19		X		X
	100R19		X		X
	100R2 Type AT		X		X
	100R2 Type AT		X		X*
	100R16		X		X
	100R16		X		
	100R2 Type AT		X		X
	100R2 Type AT		X	X	X
			X		
	100R17		X		X
	100R17, 100R9		X	X	X
	100R1 Type AT		X		
	100R1 Type AT		X	X	
	J1402, J1019	106-74 (-4 to -10)			
	J1402	106-74			
	J844				
RP305(B)	100R5	106-74 Type All (-4 to -10)			
	J1019	106-74 Type AI			
	J1019	106-74 Type All			
	J30R2, J1257		X	X	
	100R3				
	100R6				
	100R4†		X		X
			X		
	100R8				
	100R7				
	100R14				
	J51 Type 2, J2064				
	2050				

@ Use with HeatGuard™ sleeve

† Except 1"


COUPLING IDENTIFICATION

Identifying couplings is as easy as 1-2-3.

1. Determine seat type:
 - Thread interface
 - O-ring
 - Mated angle or mechanical joint
 - Mated angle with O-ring
2. Visual identification
3. Measure threads


A hydraulic coupling consists of two functional ends:

1. The hose end for hose attachment
2. The thread end for port attachment

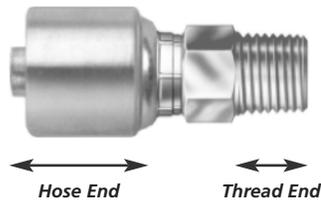

The hose end is identified by the hose size and type to which it is attached. Serration patterns are specified by the coupling manufacturer to meet performance requirements.

The thread end of a coupling (or adapter) can be identified by comparing it with the coupling being replaced or by measuring the port or thread end to which it will be attached. The thread end may also come in different configurations.

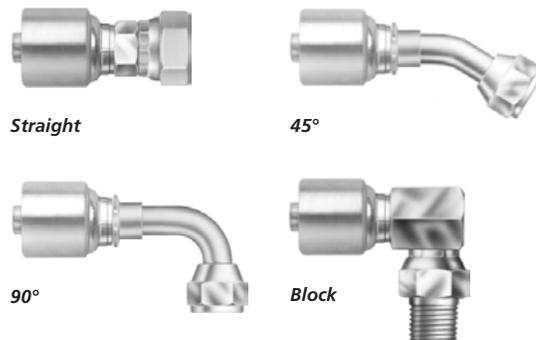

Hose ends and thread ends are measured by industry standard dash sizes. The hose end dash size refers to the inside diameter in 1/16" (except for PolarSeal® hose, SAE100R5 and SAE100R14 which are based on tube O.D. and are one size smaller than the dash size implies) i.e. – 8C5C hose is actually 13/32" I.D.

Tools used for coupling identification include: calipers, seat gauges (English and Metric), thread gauges, thread I.D. manuals and coupling templates. Gates offers several tool kits that make coupling identification fast and easy.

Thread Identification

Measuring Threads – With a caliper, measure the thread diameter at the largest point (O.D. of male threads, I.D. of female threads). Using a pitch gauge, determine the number of threads per inch. Comparison of gauge and coupling threads against a lighted background will ensure an accurate reading.


Measuring Seat Angles – When the centerline of the seat gauge points straight out of the coupling, the angles of the gauge and seat match. Compare the measurements taken to the coupling specification tables that appear in Gates Hydraulic Catalog #35093.

Coupling and Adapter End-Style Nomenclature

Gates couplings feature a meaningful description by combining end-style codes shown below that make thread identification fast and easy. Always refer to Gates Crimp Data Charts when selecting hose and coupling combinations.

In the following example, the Gates description 12GS-12FJX90L identifies a GlobalSpiral® Female JIC Swivel 90° Bend Long Drop coupling for -12 (3/4") hose size and -12 (3/4") stem size

12GS-12FJX90L

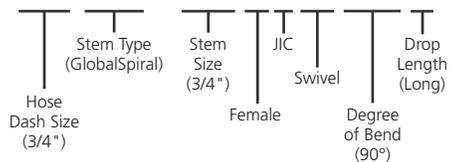

Code	Description	Code	Description
A	Adapterless	J	JIC (37° Flare)
AB	Air Brake	JIS	Japanese Industrial Standard
API	API Unions	K	Komatsu Style (Japanese 30° Seat)
B	O-Ring Boss	LH	Long Hex
BJ	Barjo	LN	Long Nose
BKHD	Bulkhead	M	Male
BL	Block	MBAX	Male Boss Adapterless Swivel
BS	Bite Sleeve	MFA	Male Flareless Assembly (Ermeto)
BSPP	British Standard Pipe Parallel	MKB	Metric Kobelco
BSPT	British Standard Pipe Tapered	MM	Metric Male
C	Caterpillar Flange Dimension	MN	Metric Nut
CC	Clamping Collar	MPG	Male Special Grease Fitting
DH	DIN Heavy	MLSP	Metric Light Stand Pipe
DL	DIN Light	MSP	Metric Stand Pipe
F	Female	NASP	North American Stand Pipe
FBFFOR	Female British Flat-Face O-Ring	OR	O-Ring
FBO	Female Braze-On Stem	P	Pipe Thread (NPTF or NPSM)
FF	Flat-Face	PL	Press Lok®
FFGX	Female French GAZ Swivel	PT	Port
FFN	Female Flareless Nut	PWX	Pressure Washer Swivel
FOR	Flat-Face O-Ring	R	Field Attachable
FFS	Female Flareless Sleeve	S	SAE (45° Flare)
FG	Female Grease Thread	SP	Special
FKX	Female Komatsu Style Swivel	TS	Tube Sleeve
FL	Code 61 O-Ring Flange	TSN	Tube Sleeve Nut
FLC	Caterpillar Style O-Ring Flange (Code 62)	X	Swivel
FLH	Code 62 O-Ring Flange Heavy	Z	Parker Triple Thread
FLOS	Flange O-Ring Special (Code 62)	22	22.5° Drop
FT	Female SAE Tube	30	30° Drop
HLE	Hose Length Extender	45	45° Drop
HLEC	Hose Length Extender (Caterpillar)	60	60° Drop
HM	Hose Mender	67	67.5° Drop
I	Inverted Flare	90	90° Drop
		110	110° Drop
		135	135° Drop

Gates Global Part Numbering System

G25100-0808


MegaCrimp® Series Stem Style	Thread Configuration (see Gates Hydraulic Catalog #35093 for descriptions)	Stem Size	Thread Size



Measuring Threads and Seat Angles

Measuring Threads


With a caliper, measure the thread diameter at the largest point (O.D. of male threads or I.D. of female threads).

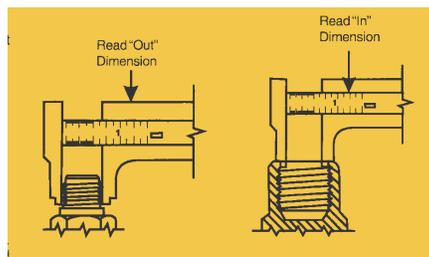

Using the pitch gauge, determine the number of threads per inch. Comparison of gauge and coupling threads against a lighted background will ensure an accurate reading.

Measuring Seat Angles

When the centerline of the seat gauge points straight out of the coupling, the angles of the gauge and seat match.

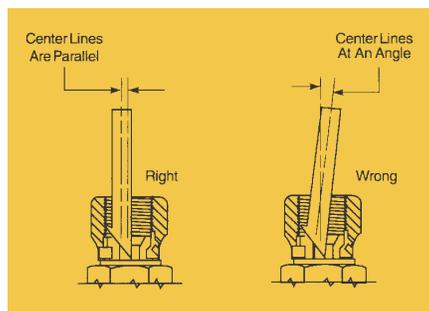

Compare the measurements taken to the coupling specification tables that appear in Gates Hydraulic Catalog #35093 or the specifications in the Gates Hydraulic Coupling International Thread Identification Manual 435-0998.

NOTE: Thread binding will occur when different thread configurations are used. DO NOT mix thread configurations.




How to Make Hose Assemblies of Specific Lengths

Select the hose and couplings required to make the desired hydraulic assembly. Measure the entire length of the assembly. Then use the formula below to calculate the required hose cut length for the assembly.

Hose Cut Length = Assembly Overall Length Minus (C1 + C2)

Cut-off value "C" is the length of that part of the coupling not directly in contact with or applied to the hose. Therefore, subtract the two "C" values from the total length of the assembly and you will have the approximate hose length to be replaced.

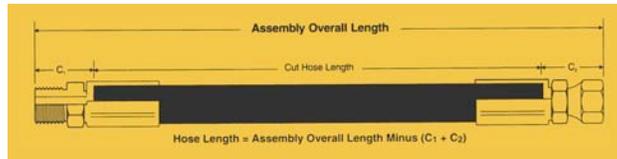

SAE Length Tolerances for Hydraulic Hose Assemblies and Specified Hose Lengths (Reprinted from National Hose Assemblies Manufacturers Association NHAM-STD-2)


Length	Tolerance
For cut lengths from 0 up to and including 12"	±1/8"
For cut lengths above 12" up to and including 18"	±3/16"
For cut lengths above 18" up to and including 36"	±1/4"
For cut lengths above 36"	+1% of length measured to the nearest 1/8"

HOSE ROUTING

Many assemblies fail because of improper routing. To minimize damage caused by excessive flexing or whipping, all replacement hose should be restrained, protected or guided using clamps. Protective armor, spring guards or sleeves made of abrasion-, temperature- or chemical-resistant material will help protect hose from cuts, abrasions, corrosives or hot components. Here are some hose routing tips that will prevent unnecessary assembly failures:


Length Change

When hose installation is straight, allow enough slack in hose line to provide for length changes that will occur when pressure is applied.





Movement/Flexing


Adequate hose length is necessary to distribute movement on flexing applications and to avoid abrasion.



Tight Bend



1. When radius is below the required minimum, use an angle adapter to avoid sharp bends.
2. Use proper angle adapters to avoid tight bends in hose.



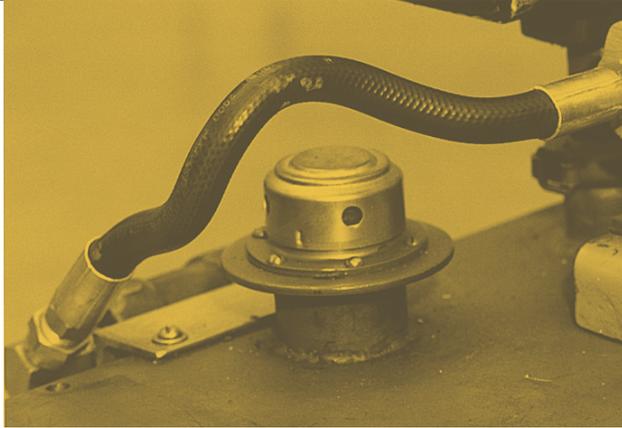


Twist

1. Prevent twisting and distortion by bending hose in same plane as the motion of the port to which hose is connected.
2. When installing hose, make sure it is not twisted. Pressure applied to a twisted hose can result in hose failure or loosening of connections.
3. Avoid twisting of hose lines bent in two planes by clamping hose at change of plane.




Strain

Elbows and adapters should be used to relieve strain on the assembly, and to provide neater installations which will be more accessible for inspection and maintenance.



Abrasion


Run hose in the installation so that it avoids rubbing and abrasion. Often, clamps are required to support long hose runs or to keep hose away from moving parts. Use clamps of the correct size. Too large a clamp allows hose to move inside the clamp and cause wear.






Collapse

To avoid hose collapse and flow restriction, keep hose bend radius as large as possible. Refer to hose specification tables for minimum bend radius.



High Heat

High ambient temperatures shorten hose life, so make sure hose is kept away from hot parts. If this is not possible, insulate hose with Gates HeatGuard™ protective sleeving.



Reduce Connections

Reduce the number of pipe thread joints by using hydraulic adapters instead of pipe fittings.



Appearance

Route hose directly by using 45° and/or 90° adapters and fittings. Avoid excessive hose length to improve appearance.



HOSE CLEANLINESS



System contaminants can decrease equipment life and cause expensive failures, so it's important to use clean components and assemblies. Cleaning methods vary based on shop capabilities, the cleanliness level required and the critical nature of the equipment.

Perhaps the easiest cleaning method is to simply blow shop air through the hose assembly after it is completed. However, this offers minimal cleaning and is the least effective method. Gates MegaClean™ system uses shop air and a small sponge to scrub the inside of the hose for improved cleanliness.

A fluid flushing apparatus provides the most effective cleaning method. With this technique, cleaning fluid is flushed at a high velocity through the hose until the hose meets the strictest cleanliness levels.

ASSEMBLY INSTALLATION

Be sure to follow these seven steps when installing a hydraulic assembly:

1. Clean the surrounding area where the connection will be made. Do not let dirt or contaminants into the opening.
2. If adapters are used, install them now.
3. Lay the hose assembly into the routing position to verify length and correct routing.
4. Thread one end of the assembly onto the port or adapter. Install angled fitting first to ensure proper positioning.
5. Now, thread the other end of the assembly, taking care not to twist the hose. Use a wrench on the fitting's backup hex while tightening.
6. Properly torque both ends.
7. Run the hydraulic system under low pressure and inspect for leaks and potentially damaging contact points.



Installation Torque

Installation torque is important to ensure a proper leak-free seal. Over-torquing of a threaded connection can stretch and damage threads and seat angles. It can also damage the staking area of a nut or possibly break a bolt on the port area. Under-torquing does not allow proper sealing. Torque should always be checked to ensure tightening is within accepted limits. The most reliable method of torquing threaded connections is to first hand-tighten the connection, then use a torque wrench to measure the torque. Torque values vary by thread configuration as follows:



CAUTION: Over-torquing may damage nuts, adapters and sealing seats which may result in leaks, breakage and potential for injury or damage to property.

Installation Torque Values

For 37° & 45° (Machined or Flared) and MegaSeal®

Steel

Size Dash	Fraction (In.)	Ft.-Lbs.		Newton-Meters	
		Min.	Max.	Min.	Max.
-4	1/4	10	11	13	15
-5	5/16	13	15	18	20
-6	3/8	17	19	23	26
-8	1/2	34	38	47	52
-10	5/8	50	56	69	76
-12	3/4	70	78	96	106
-16	1	94	104	127	141
-20	1 1/4	124	138	169	188
-24	1 1/2	156	173	212	235
-32	2	219	243	296	329

Brass

Size Dash	Fraction (In.)	Ft.-Lbs.		Newton-Meters	
		Min.	Max.	Min.	Max.
-4	1/4	5	6	6-3/4	9
-5	5/16	7	9	10	13
-6	3/8	12	15	17	20
-8	1/2	20	24	27 2/3	33
-10	5/8	34	40	46 1/3	55
-12	3/4	53	60	72 1/3	82
-16	1	74	82	100 1/2	111
-20	1 1/4	75	83	101 1/2	113
-24	1 1/2	79	87	107	118
-32	2	158	175	214	237

For Flat-Face O-Ring Seal (Steel)

Size Dash	Fraction (In.)	Ft.-Lbs.		Newton-Meters	
		Min.	Max.	Min.	Max.
-4	1/4	10	12	14	16
-6	3/8	18	20	24	27
-8	1/2	32	40	43	54
-10	5/8	46	56	60	75
-12	3/4	65	80	90	110
-14	7/8	65	80	90	110
-16	1	92	105	125	240
-20	1 1/4	125	140	170	190
-24	1 1/2	150	180	200	245

For SAE O-Ring Boss (Steel) & Gates Adapterless

4,000 psi and below

Size Dash	Fraction (In.)	Ft.-Lbs. Working Pressures 4,000 psi (27.5 Mpa) and below		Newton-Meters Working Pressures 4,000 psi (27.5 Mpa) and below	
		Min.	Max.	Min.	Max.
-3	3/16	—	—	—	—
-4	1/4	14	16	20	22
-5	5/16	—	—	—	—
-6	3/8	24	26	33	35
-8	1/2	37	44	50	60
-10	5/8	50	60	68	81
-12	3/4	75	83	101 1/2	113
-14	7/8	—	—	—	—
-16	1	111	125	150	170
-20	1 1/4	133	152	180	206
-24	1 1/2	156	184	212	250

Above 4,000 psi

Size Dash	Fraction (In.)	Ft.-Lbs. Working Pressures Above 4,000 psi (27.5 Mpa)		Newton-Meters Working Pressures Above 4,000 psi (27.5 Mpa)	
		Min.	Max.	Min.	Max.
-3	3/16	8	10	11	13
-4	1/4	14	16	20	22
-5	5/16	18	20	24	27
-6	3/8	24	26	33	35
-8	1/2	50	60	68	78
-10	5/8	72	80	98	110
-12	3/4	125	135	170	183
-14	7/8	160	180	215	245
-16	1	200	220	270	300
-20	1 1/4	210	280	285	380
-24	1 1/2	270	360	370	490

For BSP 30° Inverted Cone

Size Dash	Fraction (In.)	Ft.-Lbs.		Newton-Meters	
		Min.	Max.	Min.	Max.
-2	1/8	7	9	9	12
-4	1/4	11	18	15	24
-6	3/8	19	28	26	38
-8	1/2	30	36	41	49
-10	5/8	37	44	50	60
-12	3/4	50	60	68	81
-16	1	79	95	107	129
-20	1 1/4	127	152	172	206
-24	1 1/2	167	190	226	258
-32	2	262	314	355	426

For DIN 2353 12°, 30° and Universal Inverted Cone

Size		Ft.-Lbs.		Newton-Meters	
Light Series	Heavy Series	Min.	Max.	Min.	Max.
Tube O.D. (dash)	Tube O.D. (dash)				
-6	—	7	15	10	20
-8	—	15	26	20	35
-10	-8	18	30	25	40
-12	-10	22	33	30	45
-14	-12	26	37	35	50
-15	-14	30	52	40	70
—	-16	30	52	40	70
-18	—	44	74	60	100
-22	-20	59	89	80	120
-28	-25	74	111	100	150
—	-30	74	163	150	220
-35	—	133	184	180	250
-42	-38	148	221	200	300

PERIODIC INSPECTIONS



Periodic hose assembly inspections can prevent unwanted and unexpected assembly failures. During normal operations, be aware of how the equipment sounds, feels, etc. Be sure to check any noticeable abnormalities.

Hose inspection can vary by equipment type. Refer to your equipment manual and always follow the manufacturer's inspection recommendations. If the recommendations are not available, use the following guidelines:

- **Inspect mobile equipment every 400 to 600 hours or every three months, whichever comes first.**
- **Inspect stationary equipment every three months.**

Other factors that influence inspections include:

- **Whether the equipment is critical to the operation**
- **Operating pressures and temperatures**
- **Difficult routing conditions**
- **Extreme environmental factors**
- **Accessibility of equipment**

Inspection Procedures

Here's a checklist to help keep your equipment running strong:

- 1. First, turn off and lock out the equipment's power.**
- 2. Place the equipment and components in a safe and/or neutral position.**
- 3. Remove access panels and inspect hose and fittings for damage or leaks.**
- 4. Repair or replace assemblies as needed.**
- 5. Inspect other hydraulic components.**
- 6. Reinstall access panels.**
- 7. Turn power back on.**
- 8. Pay attention to unusual noises, vibrations, etc.**

HOSE TROUBLESHOOTING

The goal of troubleshooting is to identify the cause or causes of a hose failure, and then take the appropriate corrective action. Here's a list of some common causes of premature hose failure and some everyday solutions to correct the problems:

Hose Abrasion


Solution – Reroute the hose to keep it away from abrasive sources or guard the hose with a protective sleeve.



Hose Burst Away from Hose Ends


Solution – Inspect system operating pressure and select a hose that meets or exceeds the system's maximum pressure.

Try rerouting the hose to prevent excessive flexing or keep the hose from exceeding its minimum bend radius.



Hose Burst at Coupling

Solution – Increase the hose assembly's length to accommodate contraction under pressure; increase the hose bend radius or install bend restrictors; or replace the hose assembly with a properly crimped assembly.



Leak at Thread End/Seat

Solutions:

Remove the connection and inspect.




1. Certain couplings require the use of an O-ring. If it's missing, replace it. If an O-ring is used, check for damage caused during installation or possible material breakdown from heat or fluid incompatibility. Alternative O-ring materials may be required. Replace if necessary.
2. Check the threads and/or seat angle on both mating surfaces for damage that may have occurred prior to or during installation. Any ding or burr may be a potential leak path. Replace if necessary.

3. If the coupling was misaligned during installation, threads may have been damaged. Replace and carefully install.
4. It is possible to thread together some components that are not compatible. Use Gates thread I.D. kit to assist in identifying mating components. Some thread end configurations have better sealability than others. Also, ensure proper coupling selection.
5. Over-torquing of a threaded connection can damage threads and mating seat angles. Over-torquing can also damage the staking area of the nut causing cracking of either the nut or seat. Under-torquing does not allow proper sealing. Use of a torque wrench can alleviate such problems.

Weep/Seep at Hose Coupling Interface

Solution – Whether it has been under-crimped or the stem has been improperly inserted, the hose assembly must be replaced with one that has been properly assembled.



Coupling Blow-Off

Solution – Examine and replace the hose assembly to ensure proper assembly procedures are followed. Modify hose length and/or routing to accommodate potential hose length reduction under pressure. Never mix different manufacturers' hose, couplings or crimpers.



Hose Cracks

Solution – Select a hose that meets the temperature and flow requirements of the application. Also, identify the heat source and consider rerouting it away from the source to minimize the effects. Examine reservoir size (if necessary).




Hose Twist

Solution – Replace and reroute the hose to ensure that bending occurs only in one plane. The use of bent tube or block style couplings and adapters may improve routing. Also, when installing the assembly, hold the backup hex to prevent it from turning and applying a twist. If male and female couplings are used on the same hose assembly, install the male (non-swivel) end first.



Cover Blisters


Solution – Replace the hose with one that is recommended as compatible with the fluid being used. If it is compressed gas, the cover can also be perforated (pin-pricked) to allow the gas to seep through the cover. Textile hose covers also eliminate blistering. Bleed the system to eliminate any trapped air.

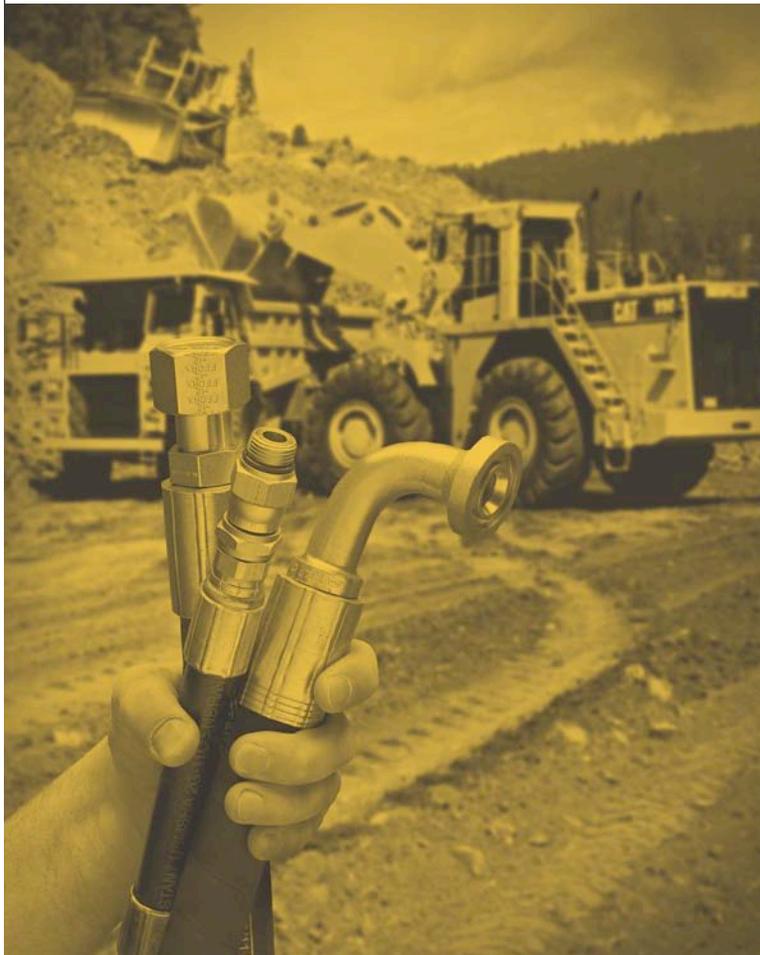

SAFE HYDRAULICS

There you have it – an overview of hydraulic safety and preventive maintenance. If you are looking for more information on this topic, Gates offers a special hydraulic preventive maintenance training program called “Safe Hydraulics.” The class provides you with everything you need to know to properly maintain your hydraulic equipment for safe operation:

- Fitting orientation
- Coupling identification
- Agency specifications
- Hydraulic fluids
- Hose storage life
- Proper installation torque values
- Crimper preventive maintenance
- Troubleshooting

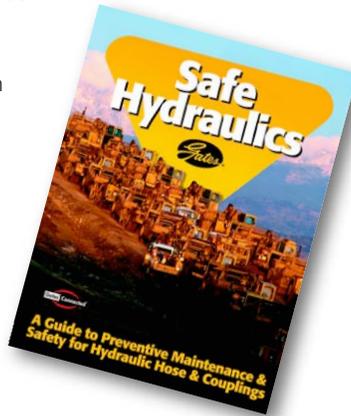

For more information, contact your local Gates hydraulic distributor or visit us online at www.gates.com/safehydraulics



A Tomkins Company

**The World's Most Trusted Name
in Belts, Hose and Hydraulics.**

Gates Corporation
P.O. Box 5887
Denver, CO 80217-5887
800-777-6363
www.gates.com