


OETIKER Swing Couplings Installation Instructions



Oetiker Swing Coupling ready to be installed.

Sealant applied to NPT thread.

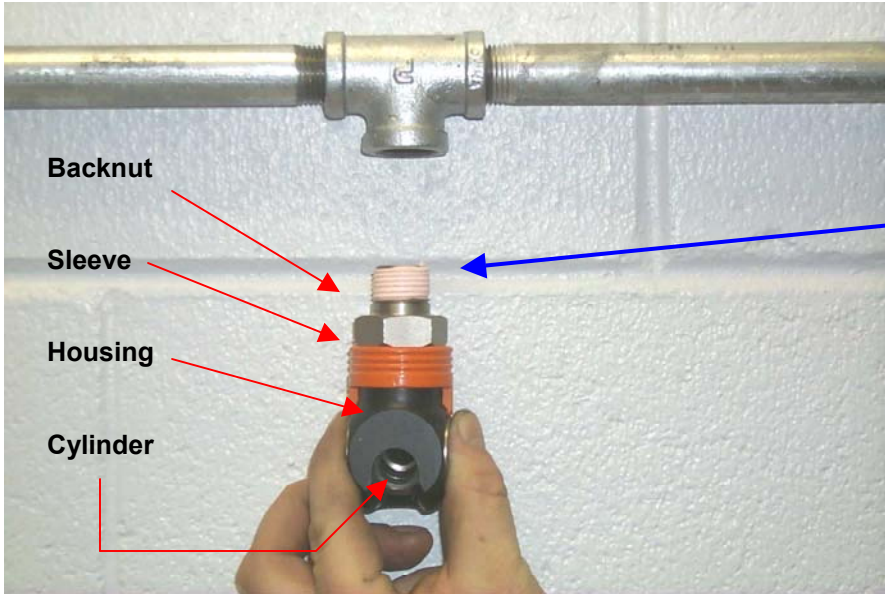

Assemble connection hand tight.



USA
Canada


Phone: (989) 635-3621
Phone: (705) 435-4394

Fax: (989) 635-2157
Fax: (705) 435-3155



Tighten the connection by using the appropriate wrench on the hexagonal surface.(Backnut)

Ensure vent hole is pointed to the wall.

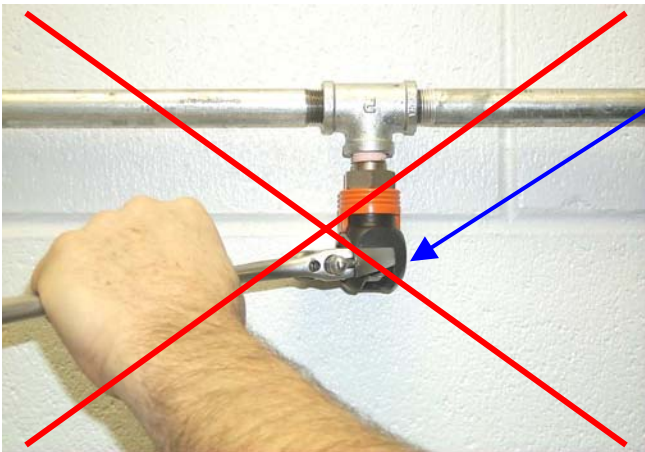

Do **not** install, remove or position the coupling using a wrench on the housing - **always** apply wrench to the backnut!



Do **not** apply any tools at the sleeve during or after installation of coupling!

For operating instructions please consult the OETIKER Swing Couplings Catalogue.



USA
Canada

Phone: (989) 635-3621
Phone: (705) 435-4394

Fax: (989) 635-2157
Fax: (705) 435-3155