

OETIKER Swing Couplings Whip Hose Installation Examples



ISO 6150 – 7.1 Installation with vibrating tools


It is recommended that a minimum length of 300 mm of flexible hose for compressed air be inserted between a vibrating tool and the quick-action coupling.




Hose barb connection



Whip hose minimum 300 mm long



Oetiker Swing Coupling

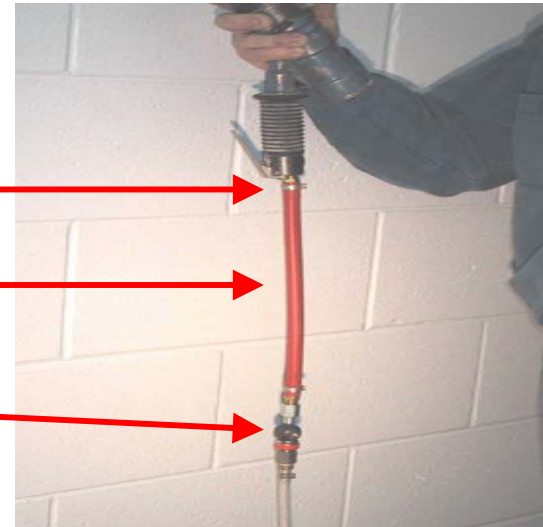

USA
Canada

Phone: (989) 635-3621
Phone: (705) 435-4394

Fax: (989) 635-2157
Fax: (705) 435-3155