PENINSULAR MILL CYLINDER SIZING CHART

HEAD CIRCULAR FLANGE (MF3)

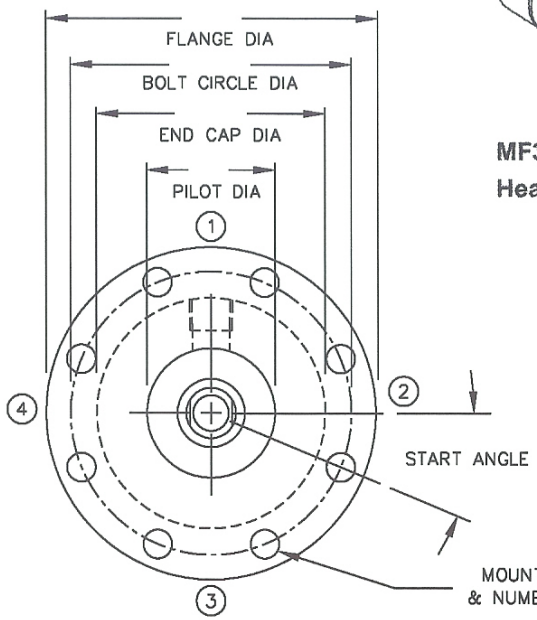



MF3 Mount
Head Circular Flange

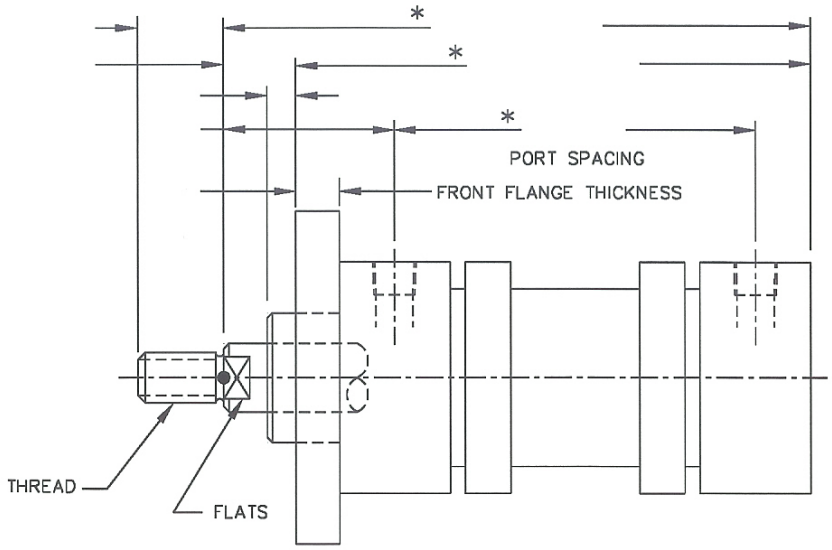

INCH CYLINDER ☐ METRIC CYLINDER ☐ AIR CYLINDER ☐ LOW PRESSURE HYDRAULIC CYLINDER ☐ HIGH PRESSURE HYDRAULIC CYLINDER ☐

IF HYDRAULIC BOX IS CHECKED, INDICATE WORKING PRESSURE: _____ INDICATE MAXIMUM RATED PRESSURE: _____ SAFETY FACTOR REQUIRED: _____

BORE DIAMETER: _____ STROKE LENGTH: _____ PISTON ROD. DIAMETER: _____

PISTON ROD END THREAD: MALE ☐ FEMALE ☐ OTHER ☐ / SPECIFY THREAD DIA., PITCH & LENGTH (I.E., 3/4"-16 x 1.125) _____

SLEEVE (TUBE) MATERIAL: STEEL ☐ OTHER ☐ / SPECIFY MATERIAL: _____

CYLINDER HEAD MATERIAL: STEEL ☐ OTHER ☐ / SPECIFY MATERIAL: _____

CUSHIONS: YES ☐ NO ☐ IF YES: / SPECIFY ROD END ONLY ☐ CAP END ONLY ☐ CUSHION AT BOTH ENDS ☐

ROD END CUSHION ADJUSTMENT LOCATION (1,2,3 OR 4): _____ CAP END CUSHION ADJUSTMENT LOCATION (1,2,3 OR 4): _____

INDICATE TYPE OF PORT: NPTF ☐ SAE O-RING ☐ 4-BOLT FLANGE ☐ METRIC ☐ OTHER (SPECIFY) _____

INDICATE PORT SIZE: BOTH ENDS _____ ROD END _____ CAP END _____

INDICATE LOCATION OF CYLINDER PORTS: ROD END (1,2,3 OR 4) _____ CAP END (1,2,3 OR 4) _____

SUPPLY EXISTING CYLINDER MANUFACTURER & MODEL NUMBER INFORMATION IF KNOWN: _____

SUPPLY ALL PERTINENT INFORMATION ON EXISTING CYLINDER TAG: _____

OPERATING FLUID: _____ OPERATING TEMPERATURE: _____ OPERATING ENVIRONMENT: _____

SPECIAL OR OPTIONAL FEATURES REQUIRED: _____



-FEATURE LOCATION KEY-
(VIEWED FACING ROD END.)

ISO 9001:2000 REGISTERED

IF NECESSARY, ATTACH DRAWINGS, SKETCHES OR PHOTOGRAPHS TO PROVIDE ADDITIONAL DETAIL REGARDING YOUR CYLINDER AND/OR APPLICATION
ANY QUESTIONS? CALL PENINSULAR AT 1-800-526-7968 OR (586) 775-7211

*-ADD STROKE TO THESE DIMENSIONS.

27650 Groesbeck Highway Roseville Michigan 48066-2759 Telephone: 586-775-7211 Fax: 586-775-4545
Toll Free: 1-800-526-7968 Internet: www.peninsularcylinders.com Email: sales@peninsularcylinders.com

MEMBER NFPA

REL. 10-14-02